

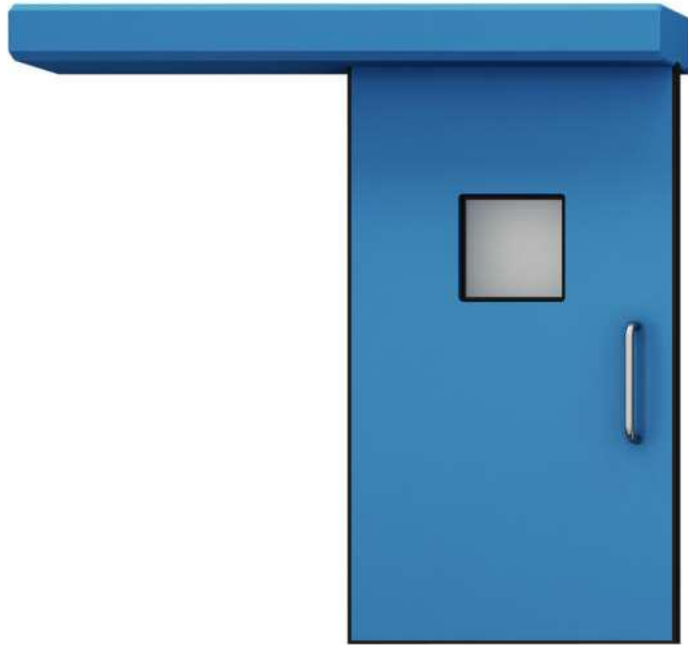


Sliding Door - Medical Gas-Tight Door Technical Data

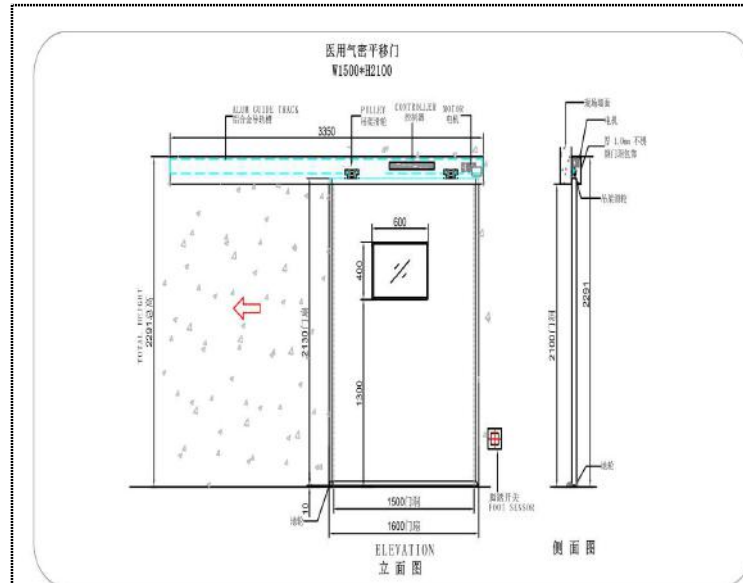



Door	Parts Name	Description
Door Body	1 Door leaf	Galvanized sheet / S.S sheet / HPL / Aluminium sheet
	2 Sandwich	Paper honeycomb / aluminum honeycomb filling
	3 Observation Window	5mm thick tempered double-layer insulating glass
	4 Edging	Stainless steel / aluminum
	5 Anti-collision belt	304 stainless steel
	6 Sealing strip buffer strip	Silica gel
Hardware Parts	1 Handle	Opt 1: Stainless steel 2mm thick; Opt 2: Recess handle
	2 Auto Sensor Opening	Sensor system
Head Cover System	1 Aluminium Guide Track	Factory available standard
	2 Hanger	Factory available standard
	3 Pulley	Factory available standard
	4 Belts	Factory available standard
	5 Controller	Factory available standard
	6 Motors	Made in China brand Motors; Panasonic Motor Brand.
	7 Headcover	Factory available standard
Standard Size	Single Door Width \cong 2000.0 mm; Height: 2100.0 - 3000.0 mm	Thickness: 50.0mm
	Double Door Width \cong 3000.0 mm; Height: 2100.0 - 3000.0 mm	Thickness: 50.0mm
Operation Working	Opening / Closing door speed: 250 - 500mm / s; Opening Time: 2 - 20 S; Closing force F > 70N; Manual Thrust < 100N; Overall Consumption < 150W	

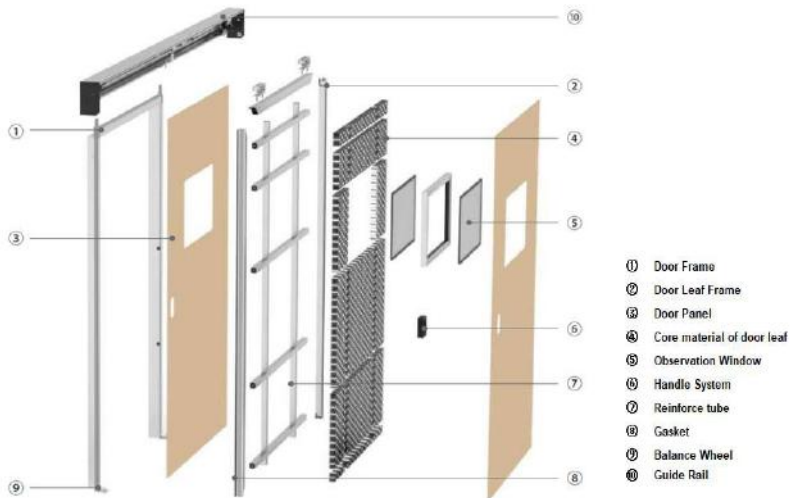

Sliding Door Hospital - Anti X-ray room Medical Door Technical Data



Door	Parts Name	Description
Door Body	1 Door leaf	Galvanized sheet / S.S sheet / HPL / Aluminium sheet
	2 Sandwich	Paper honeycomb / aluminum honeycomb filling
	3 Observation Window	Lead Glass: Pbmm:1.0 ; Pbmm:2.0; Pbmm:3.0; Pbmm:3.5
	4 Lead Plate	Pbmm:1.0 ; Pbmm:2.0; Pbmm:3.0; Pbmm:3.5
	5 Anti-collision belt	304 stainless steel
	6 Accessories	Silica gel; Sealing strip buffer strip; edging
Hardware Parts	1 Handle	Opt 1: Stainless steel 2mm thick; Opt 2: Recess handle
	2 Auto Sensor Opening	Sensor system
Head Cover System	1 Aluminium Guide Track	Factory available standard
	2 Hanger	Factory available standard
	3 Pulley	Factory available standard
	4 Belts	Factory available standard
	5 Controller	Factory available standard
	6 Motors	Made in China brand Motors; Panasonic Motor Brand.
	7 Headcover	Factory available standard
Standard Size	Single Door Width \cong 2000.0 mm; Height: 2100.0 - 3000.0 mm	Thickness: 50.0mm
	Double Door Width \cong 3000.0 mm; Height: 2100.0 - 3000.0 mm	Thickness: 50.0mm
Operation Working	Opening / Closing door speed: 250 - 500mm / s; Opening Time: 2 - 20 S; Closing force F > 70N; Manual Thrust < 100N; Overall Consumption < 150W	

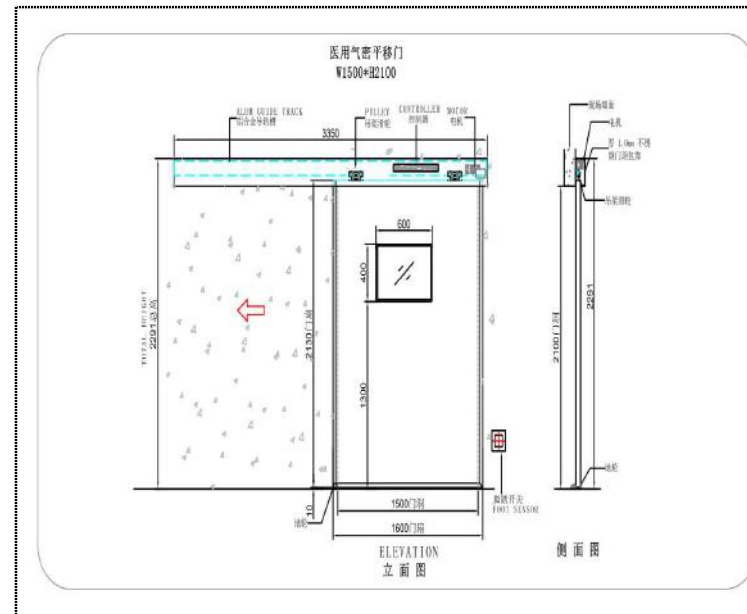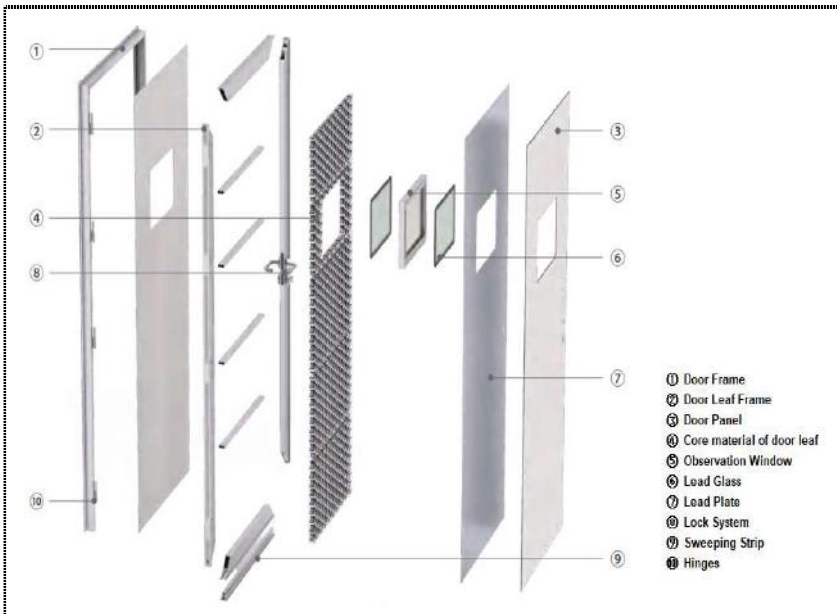

Lead line Swing Door - Anti X-ray room Medical Door Technical Data



Door	Parts Name	Description
Door Body	1 Door leaf	Galvanized sheet / S.S sheet / HPL / Aluminium sheet
	2 Sandwich	Paper honeycomb / aluminum honeycomb filling
	3 Observation Window	Lead Glass: Pbmm:1.0 ; Pbmm:2.0; Pbmm:3.0; Pbmm:3.5
	4 Lead Plate	Pbmm:1.0 ; Pbmm:2.0; Pbmm:3.0; Pbmm:3.5
	5 Anti-collision belt	304 stainless steel
	6 Accessories	Silica gel; Sealing strip buffer strip; edging
Hardware Parts	1 Handle	Stainless steel 2mm thick;
	2 Auto Sensor Opening	Sensor system
Wall Frame	1 single side wall frame	1.2mm/Galvanized sheet ; Powder coating finished
	2 Full wall frame	1.2mm/Galvanized sheet ; Powder coating finished
Standard Size	Width: 800 / 900 / 950 mm; Height:2100.0mm ; Thickness: 50.0mm	
Operation Working	Opening / Closing door speed: 250 - 500mm / s; Opening Time: 2 - 20 S; Closing force F > 70N; Manual Thrust < 100N; Overall Consumption < 150W	

